

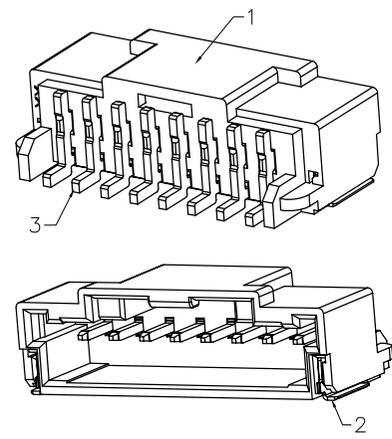





5	6	7	8
REV.	DATE	ECN NO.	MODIFICATION
AO	2024.04.22		NEW
			APPROVER
			Jason

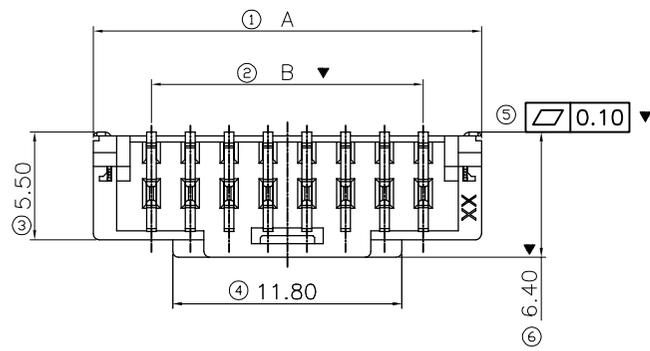

3D View

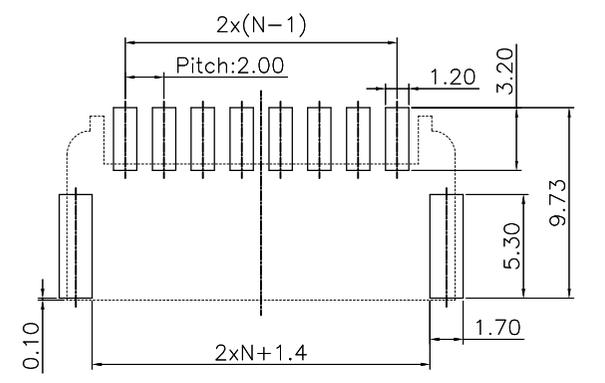

RECOMMENDED PCB LAYOUT(TOP VIEW)
DEFAULT TOLERANCE:±0.05

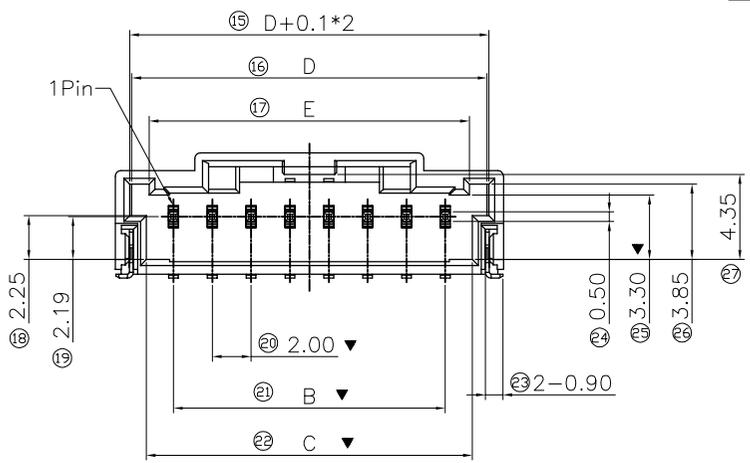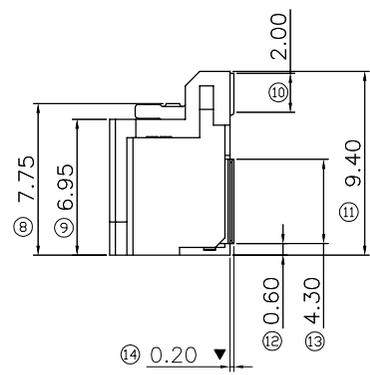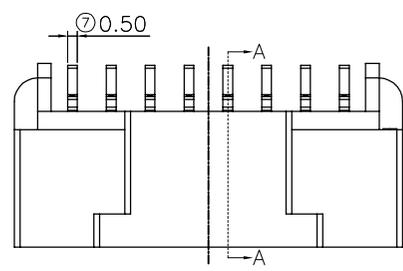

8Pin

SPECIFICATIONS

- MATERIAL
 - Housing: Thermoplastic, UL94V-0
 - Solder tab: Stainless steel, Tin plated
 - Contact PIN: Copper Alloy, Tin plated
- Electrical Characteristics:
 - Applicable: AWG#22~#26
 - Voltage rating: AC,DC,125V(rms)
 - Current rating: 3A AC/DC
 - Withstand voltage: 500V AC/min
 - Insulation resistance: $\geq 1000M\Omega$
 - Contact resistance: $\leq 20m\Omega$
 - Working Temperature: $-40^{\circ}C \sim +125^{\circ}C$
 - Storage Temperature: $-25^{\circ}C \sim +85^{\circ}C$
70%R.H.Max.(No Condensation)
- MAJOR DIMENSION:▼
- Products meet ROHS environmental requirements



极数(N)	尺寸				
	A	B	C	D	E
2	8.00	2.00	4.80	6.30	/
3	10.00	4.00	6.80	8.30	6.50
4	12.00	6.00	8.80	10.30	8.50
5	14.00	8.00	10.80	12.30	10.50
6	16.00	10.00	12.80	14.30	12.50
7	18.00	12.00	14.80	16.30	14.50
8	20.00	14.00	16.80	18.30	16.50
9	22.00	16.00	18.80	20.30	18.50
10	24.00	18.00	20.80	22.30	20.50
11	26.00	20.00	22.80	24.30	22.50
12	28.00	22.00	24.80	26.30	24.50
13	30.00	24.00	26.80	28.30	26.50
14	32.00	26.00	28.80	30.30	28.50
15	34.00	28.00	30.80	32.30	30.50

GENERAL TOLERANCE			UNITS mm	NAME(INTENDED USE) Wafer 2.0	ATOM ® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.						
SELECT	1	2				3	PART NO.(INTENDED USE) WF200**-53***	TITLE: Customer DRAWING FOR Wafer 2.0 XP SMT 带内扣 卧式 H=6.4mm 卷装			
TOL.	±0.10	±0.15	±0.20	FINISH	DWG NO.: ATOM-A09667						
ON.	X.XXX	X.XX	X.X			Q'TY	<table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>1:1</td> <td>1/2</td> <td>AO</td> </tr> </table>	SCALE	SHEET	REV.	1:1
SCALE	SHEET	REV.									
1:1	1/2	AO									
	X			DR: Frank							

1 2 3 4 5 6 7 8

A

A

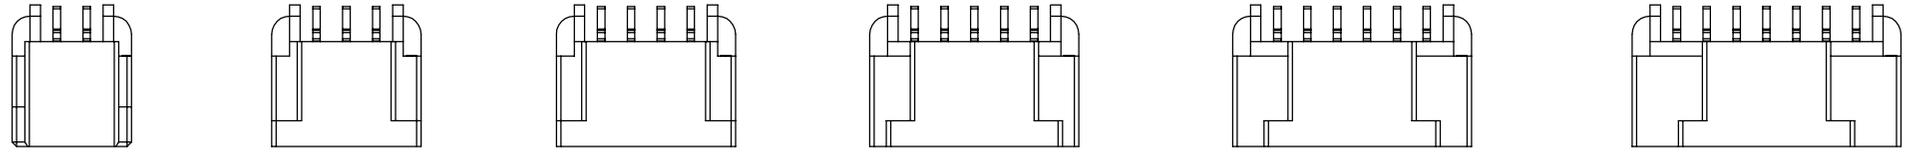

2Pin

3Pin

4Pin



5Pin

6Pin

7Pin

B

B

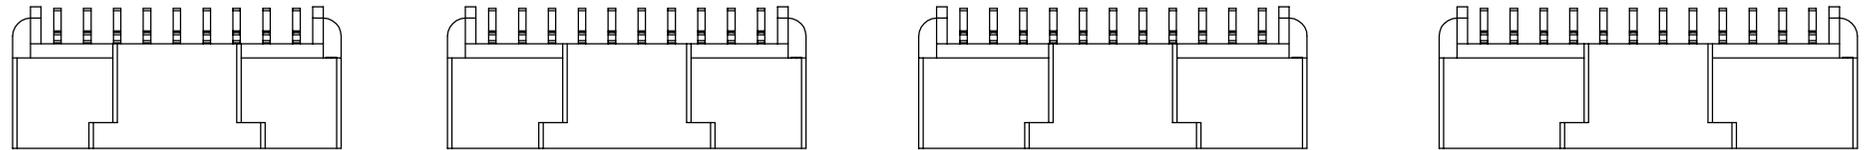

9Pin



10Pin

11Pin

12Pin

C

C

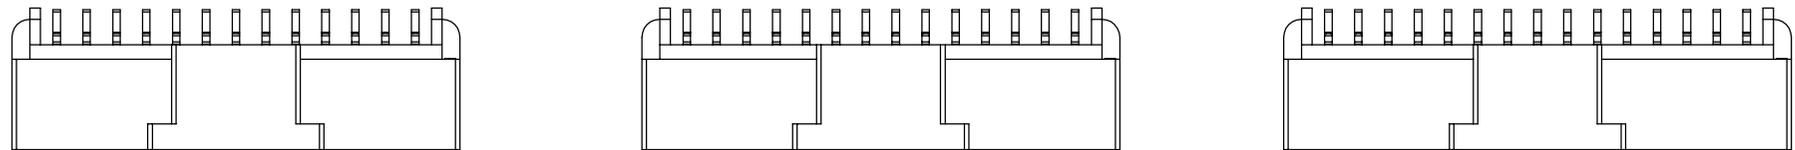

13Pin

14Pin

15Pin

D

D

PART NO.
WF200**-53***

产品代码WF:Wafer简写
产品间距:2.00mm
产品Pin位: 02-15

预留码
1表示管装
2表示卷装
53:卧式带内扣

GENERAL TOLERANCE			UNITS mm	NAME(INTENDED USE) Wafer 2.0	ATOM ® 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
SELECT	✓							
TOL.			MAT'L	PART NO.(INTENDED USE) WF200**-53***	TITLE: Customer DRAWING FOR Wafer 2.0 XP			
ON.	1	2			3	SMT 带内扣 卧式 H=6.4mm 卷装		
X.XXX	±0.10	±0.15	±0.20	FINISH	APPD:	DWG NO.: ATOM-A09667		
X.XX	±0.15	±0.20	±0.25			Q'TY	CHKD:	
X.X	±0.20	±0.25	±0.30	DR: Frank				
X.	±0.25	±0.30	±0.50					
ANGLE	±2'							
						SCALE	SHEET	REV.
						1:1	2/2	AO

E

E

1 2 3 4 5 6 7 8